




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>C25C 7/06</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/11841</b> (43) International Publication Date: <b>11 March 1999 (11.03.99)</b>
<p>(21) International Application Number: <b>PCT/FI98/00655</b></p> <p>(22) International Filing Date: <b>26 August 1998 (26.08.98)</b></p> <p>(30) Priority Data: <b>973565</b> <b>29 August 1997 (29.08.97)</b> <b>FI</b></p> <p>(71) Applicant (for all designated States except US): <b>OUTOKUMPU OYJ [FI/FI]; Riihitontuntie 7, FIN-02200 Espoo (FI).</b></p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): <b>MARTTILA, Tom [FI/FI]; Humaljärventie 5, FIN-02400 Kirkkonummi (FI).</b></p> <p>(74) Agent: <b>OUTOKUMPU OYJ; Patent Services, P.O. Box 27, FIN-02201 Espoo (FI).</b></p>	<p>(81) Designated States: <b>AU, BG, BR, CA, CN, JP, KR, MX, PL, US, Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</b></p> <p><b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: SEPARATING MEMBER FOR SEPARATING THE TANK BOTTOM PART FROM THE REST OF THE TANK

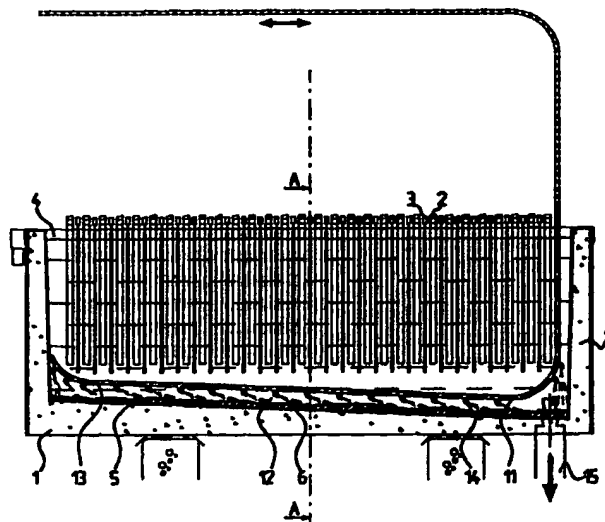

## (57) Abstract

The invention relates to a separating member for separating the bottom part of an electrolytic tank from the rest of the tank space in connection with the removal of solids (6) settled onto the bottom of the electrolytic tank (1). According to the invention, in the electrolytic tank (1) there are installed support and control members (10), which form the trajectory of the separating member (11, 21, 31), so that the separating member (11, 21, 31) can be inserted in the electrolytic tank (1) and removed therefrom via a space left in between at least one rear wall (7, 32) of the electrolytic tank (1) and the electrode (2) located nearest to said rear wall (7, 32).

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## SEPARATING MEMBER FOR SEPARATING THE TANK BOTTOM PART FROM THE REST OF THE TANK

The present invention relates to a separating member for separating the bottom  
5 of an electrolytic tank from the rest of the tank in connection with removing the solids created in the electrolytic tank.

In an electrolytic process, there are precipitated metals such as copper, nickel and zinc onto the surface of cathodes provided in an electrolytic tank, either  
10 starting from metal anodes that dissolve in the electrolyte present in the electrolytic tank, or from metal ions already dissolved in the electrolyte. However, all solids are not precipitated onto the cathode surfaces; these are for example precious metals and solid impurities contained in the electrolyte. Therefore, along with a metal refining process, on the bottom of the electrolytic tank there  
15 are accumulated various solids that must from time to time be removed from the tank, for instance because the solids contain valuable ingredients, such as precious metals, or because a thicker solids accretion threatens the purity of the cathode obtained from the electrolytic process.

20 Generally the solids accumulated in an electrolytic tank are at least partly very finely divided and only slightly heavier than the electrolyte, wherefore it is difficult to separate the solids from the electrolyte. In the course of the electrolytic process, it is extremely harmful if the solids start circulating from the electrolytic tank bottom, because then the chance that the solids end up on the cathode is  
25 particularly great, and this would result in a substantial drop in the purity of the metal to be produced.

Generally the removal of solids accumulated on the bottom of an electrolytic tank requires that the whole electrolytic process must be interrupted, which  
30 reduces the efficiency per unit of time, i.e. the productivity of the electrolytic plant. Thus the removal of solids must be made part of the replacing process of

the electrolytes, i.e. anodes and cathodes, which makes the replacing complicated and slow and restricts the solids removal to take place in a rhythm determined by said replacing exchange process. Moreover, a remarkable amount of electrolyte must first be removed from the tank and then returned therein, which  
5 generally has harmful effects on the electrolyte quality and causes a lot of extra work. In the solids treatment system, there also is conducted a remarkable amount of electrolyte, which must be replaced with a new one and may be harmful in the further processing of the solids. In addition to this, the manual washing of the electrolytic tanks makes the process clearly more labor-intensive  
10 and subjects the employees to various health hazards, for instance owing to the effect of splashes sprayed from the tank and of the ingredients contained in the spray. Likewise, owing to the number of employees needed in the manual washing of the tanks, it is often nearly impossible to automate the handling of the electrolytes, which further increases the need for labor in the electrolytic  
15 plant.

The object of the present invention is to obviate some of the drawbacks of the prior art and to realize an advanced separating member suited in electrolytic tanks in order to separate the electrolytic tank bottom from the rest of the tank,  
20 so that the removal of solids from the electrolytic tank bottom can be carried out without essentially disturbing the electrolytic process. The essential novel features of the invention are apparent from the appended claims.

According to the invention, in an electrolytic tank, advantageously in the  
25 electrolytic tank walls, there are installed support members which, in addition to providing support, also guide the path of the separating member to be installed in the electrolytic tank. Said separating member is arranged in the tank, substantially along the whole length thereof, essentially near to the tank bottom, for the duration of the removal of solids found on the tank bottom, so that the  
30 separating member separates the liquid electrolyte from the solids that are settled onto the electrolytic tank bottom that are meant to be removed.

The separating member according to the invention is manufactured of flexibly connected structure elements which form an essentially sealed surface, but which can also be bent in relation to each other. Thus the separating member  
5 can be installed in the electrolytic tank without any particular aperture made in the tank, simply by conducting the separating member onto the surface of the liquid electrolyte, and further under the surface, substantially near to the rear wall of the electrolytic tank.

10 When the need arises to remove the solids accumulated onto the electrolytic tank bottom, the separating member according to the invention is first conducted to above the electrolytic tank, into a space located in between the rear wall of the electrolytic tank and the electrode located nearest to said rear wall, so that one end of the separating member advantageously is substantially  
15 near to the electrolyte surface. When the separating member is started to be conducted from the transport member into the electrolytic tank, to underneath the electrolyte surface, the passage of the separating member in the electrolyte is controlled by means of support and control members attached in the electrolytic tank, advantageously in the electrolytic tank walls. Said support and control  
20 members form the trajectory of the separating member in the electrolytic tank. The support and control members attached in the vicinity of the electrolytic tank bottom are installed in the tank at such a height with respect to the electrolytic tank bottom that when moving the separating member at a speed determined by the transport member, the solids found on the electrolytic tank bottom  
25 cannot start circulating due to the motion of the separating member, and thus the solids are prevented from remixing with the liquid electrolyte.

Owing to the mutual flexibility of the structural elements of the separating member, the proceeding direction of the separating member can be changed  
30 from a substantially vertical direction in the vicinity of the rear wall of the electrolytic tank to a substantially horizontal direction in the vicinity of the side

walls of the electrolytic tank, when installing the separating member in the tank. Thus the support and control members of the separating member can be arranged essentially near to both rear walls of the electrolytic tank, so that the separating member can advantageously be inserted in the electrolytic tank  
5 through a space in the vicinity of one rear wall and removed therefrom through a space in the vicinity of the other rear wall.

When the separating member according to the invention is placed in an electrolytic tank, the separating member separates the part of the tank that is located  
10 near the bottom from the rest of the tank, and simultaneously it separates the solids found on the electrolytic tank bottom from the electrolyte needed in the electrolytic process. Consequently, the space left in between the separating member and the electrolytic tank bottom can be cleared of solids without the solids getting a chance to be mixed into the liquid electrolyte present in the rest  
15 of the tank. Thus the removal of solids can be carried out while the electrolytic process is in operation, and completely separately from the electrode treatment step. When the solids have been removed from the electrolytic tank bottom, the separating member is removed from the tank by utilizing the support and control members attached in the electrolytic tank, and shifted onto a separating  
20 member conveyor provided outside the tank; said conveyor transfers the separating member to another electrolytic tank, where a corresponding removal of solids from the electrolytic tank bottom must be carried out.

The separating member according to the invention can be placed in the electrolytic tank so that in between the separating member and the opposite rear wall,  
25 there is left a substantial clearing, so that the separating member does not impermeably separate the solids located underneath the separating member from the electrolyte located above it. In that case the separating member is not strained by the weight of the electrolyte resting above it, and the space  
30 separated by the separating member is thus in connection with the space containing the electrolyte.

The separating member according to the invention can also be placed in the electrolytic tank so that the separating member separates the space left underneath the separating member, containing the solids, in a substantially impermeable fashion. In that case the separating member can advantageously be  
5 provided for example with a sealing agent filled with some liquid or gaseous substance that seals the separating member, installed in the electrolytic tank and settled in place, against the electrolytic tank walls.

In addition to the space located near the tank bottom, the separating member  
10 can also separate other spaces from the electrolytic tank, at least the space located in the vicinity of one of the rear walls, so that said space separated from the vicinity of the rear wall can advantageously be utilized for example when removing the solids.

15 While using a separating member according to the invention, the support and control members of the separating member can be installed in the electrolytic tank, either so that when moving the separating member, there are used only those support and control members that are located near one of the rear walls, in which case the motion of the separating member takes place back and forth;  
20 or then in the vicinity of both rear walls of the electrolytic tank there are installed support and control members, so that the separating member is inserted into the electrolytic tank through the space left in between the electrode located in the vicinity of one rear wall and said rear wall, and removed from the electrolytic tank through the space left in between the opposite rear wall and the electrode  
25 located in the vicinity thereof, in which case the motion of the separating member takes place always in the same direction.

In the separating member, there can also be connected at least part of the electrolytic tank bottom scrubbing apparatus, in which case the scrubbing  
30 apparatus enters the electrolytic tank along with the separating member. The scrubbing apparatus connected to the separating member can contain for

instance washing nozzles or mechanical solids removal devices, in which case onto the electrolytic tank bottom part, there can be conducted some solids scrubbing agent, such as liquid or gas.

- 5 The invention is explained in more detail with reference to the appended drawings, wherein
- figure 1 illustrates a preferred embodiment of the invention in partial side-view cross-section,
- figure 2 illustrates the embodiment of figure 1, seen from the direction A - A,
- 10 figure 3 illustrates another preferred embodiment of the invention, seen in a partial side-view cross-section, and
- figure 4 illustrates a third preferred embodiment of the invention, seen in a partial side-view cross-section.
- 15 According to figures 1 and 2, in an electrolytic tank 1 there are placed electrodes, anodes 2 and cathodes 3, in an alternating fashion, and the metal to be produced in the electrolytic process is precipitated on the cathode 3 by means of the electrolytic solution 4 provided in the electrolytic tank 1. In the course of the electrolytic process, on the bottom 5 of the electrolytic tank, there
- 20 are settled solids 6, which must from time to time be removed from the tank 1. According to the invention, on the side walls 8 and 9 of the electrolytic tank 1, there are installed support and control members 10. By means of said support and control members 10, the separating member 11 is supported when it is placed in the electrolytic tank 1, and it is conducted into the tank 1, so that the
- 25 members 10 form the trajectory of the separating member 11. The separating member 11, which separates the electrolytic tank bottom part 12 containing solids 6 from the rest of the tank 1, is formed of flexibly interconnected structural elements 13, which enable an advantageous bending of the separating member 11 while proceeding from the vicinity of the rear wall 7 to the vicinity of
- 30 the electrolytic tank bottom 5.



In the embodiment according to figures 1 and 2, the separating member 11 is provided with nozzles 14, through which there is conducted liquid or gas into the bottom part 12 in order to facilitate the removal of solids 6. The solids 6 and the liquid left in the bottom part 12, as well as the liquid or gas fed therein  
5 through the nozzles 14, are removed from the electrolytic tank 1 via an outlet 15 provided on the electrolytic tank bottom 5.

The embodiment according to figure 3 differs from the embodiment of figure 1 in that the separating member 21 is installed in the electrolytic tank 1 in a  
10 sealed fashion. Thus the bottom part 22, separated from the electrolytic tank by means of the separating member 21, and the space 23 left in between the separating member 21 and the electrolytic tank rear wall 7, together form a substantially closed space, so that the solids 24 and the liquid found in the spaces 22 and 23 are discharged from the electrolysis via the space 23.

15

In figure 4, a separating member 11 according to figure 1 is placed in an electrolytic tank 1, so that support and control members 10 are installed in the electrolytic tank side walls 8 and 9 in order to ensure that the separating member 11 is inserted in the electrolytic tank for instance in the vicinity of the  
20 rear wall 7 and removed from the electrolytic tank 1 in the vicinity of the second rear wall 32.

## CLAIMS

1. A separating member for separating the bottom part of an electrolytic tank from the rest of the tank in connection with the removal of solids (6) settled onto  
5 the bottom of the electrolytic tank (1), **characterized in that** in the electrolytic tank (1), there are installed support and control members (10) which form the trajectory of the separating member (11, 21, 31), so that the separating member (11, 21, 31) can be inserted in the electrolytic tank (1) and removed therefrom through a space left in between at least one rear wall (7, 32) of the  
10 electrolytic tank and the electrode (2) located nearest to said rear wall.
2. A separating member according to claim 1, **characterized in that** the separating member (11, 21, 31) is manufactured of structural elements (13) which are interconnected so that said elements (13) bend with respect to each  
15 other.
3. A separating member according to claim 1 or 2, **characterized in that** the space (12) separated by the separating member (11, 21, 31) near the electrolytic tank bottom and the space (23) located in the vicinity of the rear wall form  
20 an essentially closed space.
4. A separating member according to claim 3, **characterized in that** the separating member (11, 21, 31) forms a sealed, uniform surface in the electrolytic tank (1).  
25
5. A separating member according to claim 1 or 2, **characterized in that** the space (12, 23) separated by the separating member (11, 21, 31) is connected to the space of the electrolytic tank containing the electrolyte (4).
- 30 6. A separating member according to one of the preceding claims, **characterized in that** at least part of the solids scrubbing apparatus (14) is attached to

the separating member (11, 21, 31) in order to feed scrubbing agent to the bottom part (12) of the electrolytic tank.

7. A separating member according to claim 6, **characterized in that** the scrub-  
5 bing agent is a liquid.

8. A separating member according to claim 6, **characterized in that** the scrub-  
bing agent is a gas.

1/4

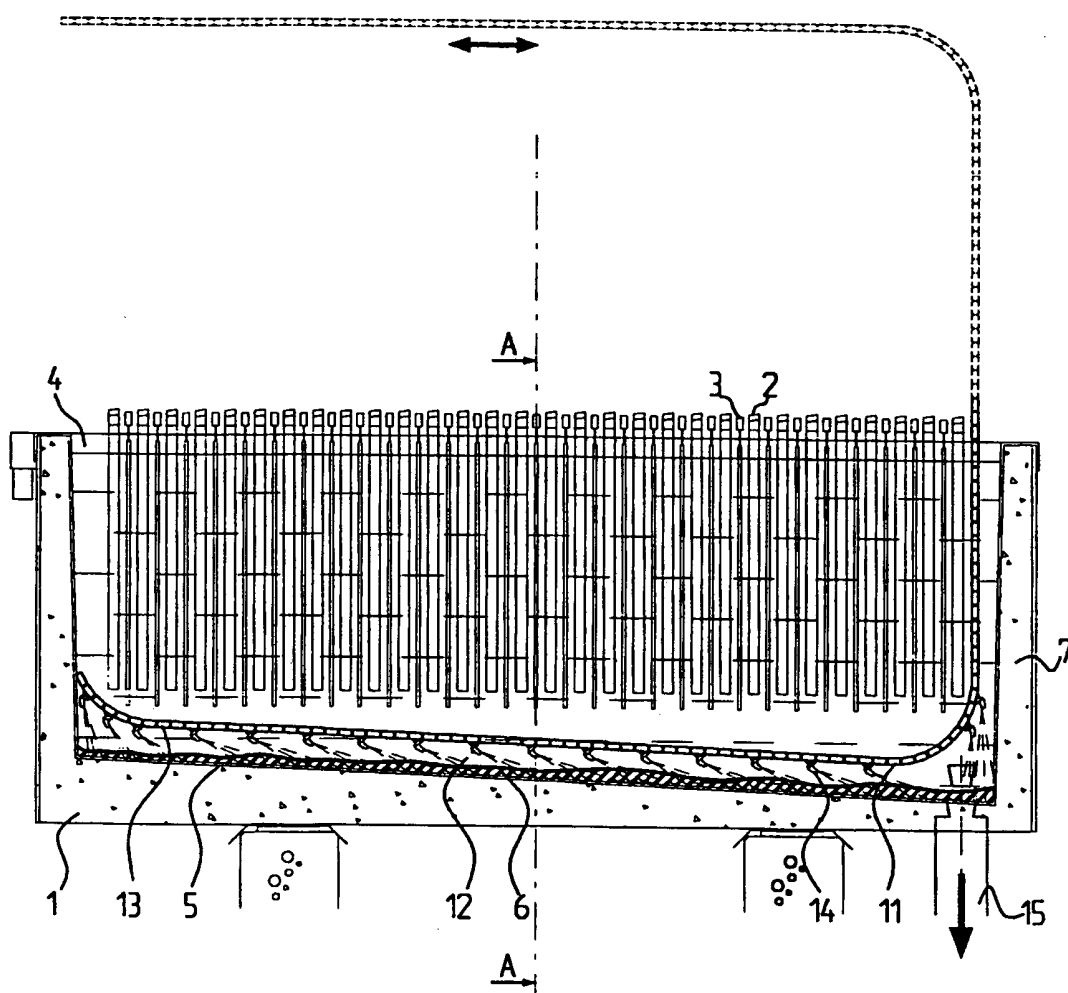


Fig. 1

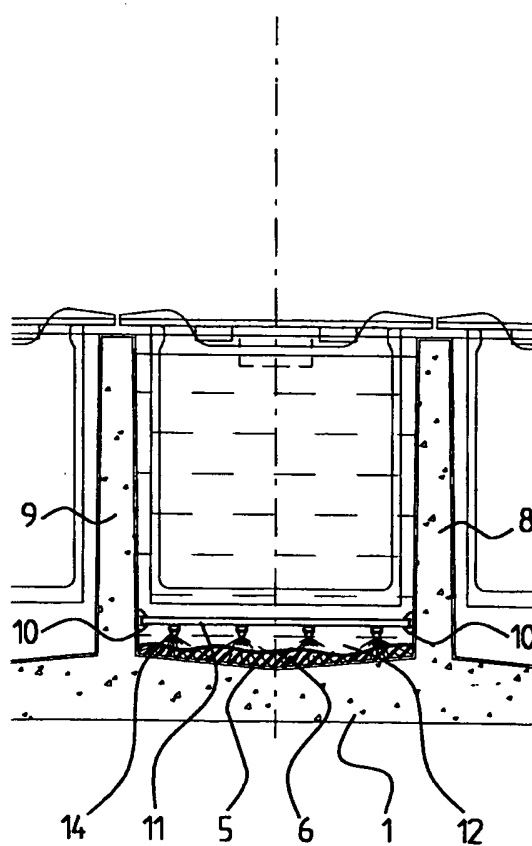


Fig. 2

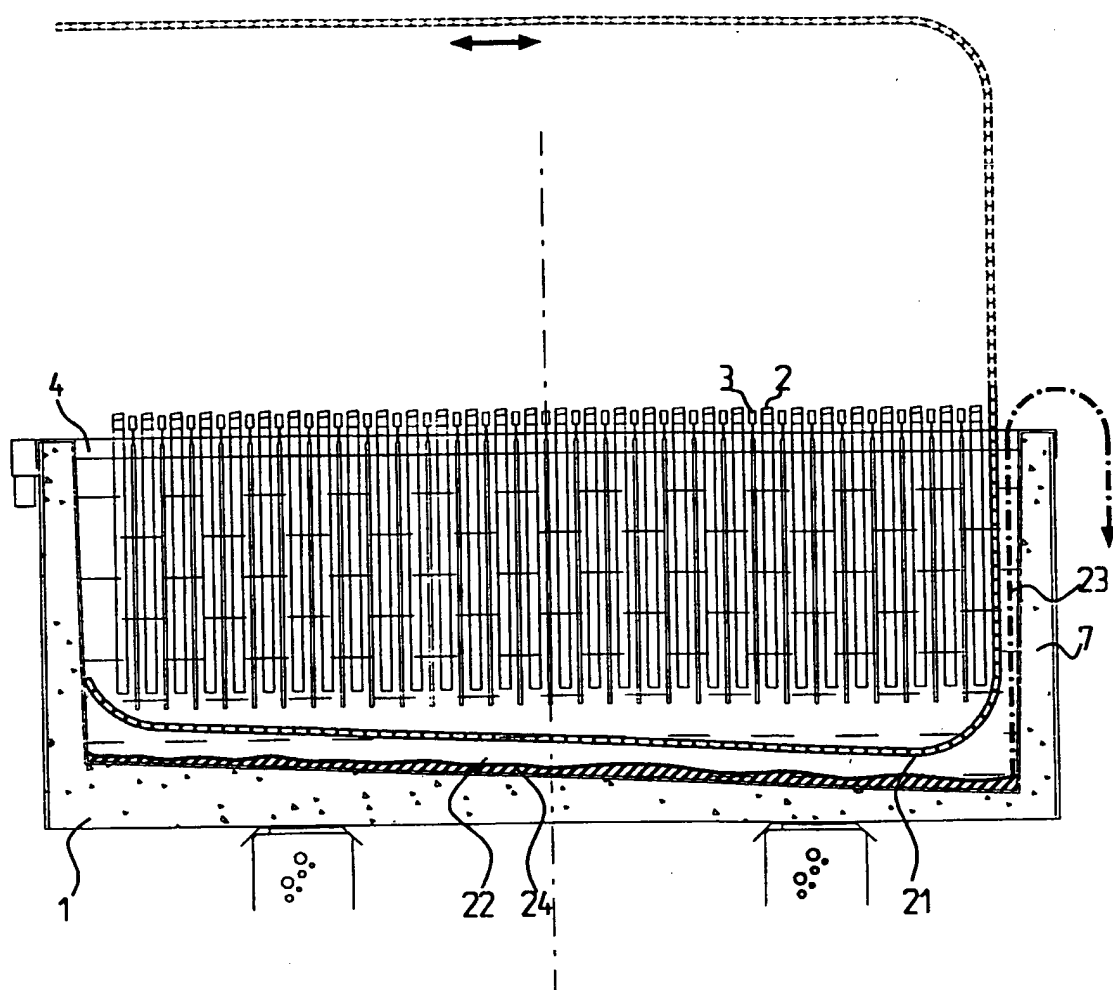


Fig. 3

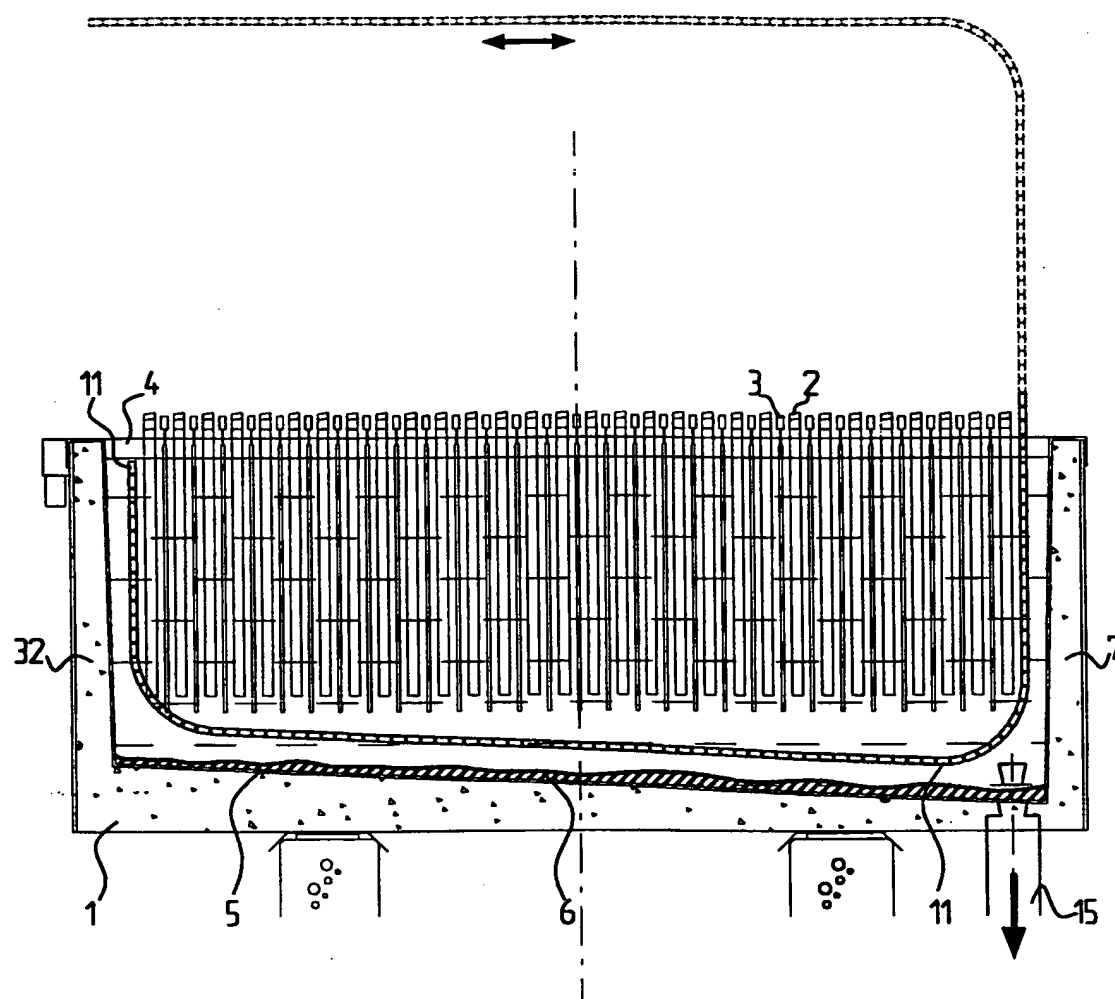


Fig. 4

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 98/00655

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: C25C 7/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: C25C, C25B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC, WPI

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2045801 A (MONTEDISON S.P.A.), 5 November 1980 (05.11.80), abstract --	1
A	US 4214964 A (JOHN F. CANNELL), 29 July 1980 (29.07.80), abstract --	1
A	EP 0646662 A1 (ASTURIANA DE ZINC, S.A.), 5 April 1995 (05.04.95), figure 3, abstract -----	1

☐ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

18 January 1999

Date of mailing of the international search report

22 -01- 1999

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Jan Carlerud  
Telephone No. +46 8 782 25 00



# INTERNATIONAL SEARCH REPORT

Information on patent family members

01/12/98

International application No.

PCT/FI 98/00655

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2045801 A	05/11/80	BE 881955 A	27/08/80
		CA 1126208 A	22/06/82
		DE 3006614 A	04/09/80
		FR 2450288 A,B	26/09/80
		JP 56044783 A	24/04/81
		NL 8001020 A	29/08/80
		US 4303491 A	01/12/81
US 4214964 A	29/07/80	NONE	
EP 0646662 A1	05/04/95	SE 0646662 T3	
		AT 166929 T	15/06/98
		AU 668809 B	16/05/96
		AU 5929294 A	23/02/95
		BR 9401978 A	07/03/95
		CA 2116205 A	11/02/95
		CN 1106474 A	09/08/95
		DE 69410723 D	00/00/00
		ES 1025144 Y	01/06/94
		ES 2069496 A,B	01/05/95
		FI 943140 A	11/02/95
		JP 2754155 B	20/05/98
		JP 7062586 A	07/03/95
		NO 940942 A	13/02/95
		US 5543020 A	06/08/96
		ZA 9403211 A	31/03/95